



Construction Industry Products (Aust) Pty Ltd
 PO Box 579
 Archerfield BC Qld 4108
 Ph: 0400 779 106
 Email: michael@cipapl.com.au

ABN: 51 656 157 596
 ACN: 656 157 596

SS-69JM or Auto 2" Cast Iron Sub Pump




The SS6-9 is a rugged, cast iron cased, electric submersible pump, powered by a single phase, 0.4 Kw, 240Vdc, 50Hz induction motor drawing 3.9 Amps. Optimum performance being 6m3 / Hr at 9Mts head.

For safety, the pump features both in-built capacitor start and thermal cut-out with automatic resetting, to protect the motor windings from overheating, either from current surge or mechanical blockage. Stainless steel screws used throughout the pump.

The pump and motor share a common stainless-steel shaft with a double-faced silicon carbide mechanical seal and intervening oil chamber for seal life in excess of 6,000 hours use. The oil chamber itself features an inspection plug for periodical testing of the oil. The condition of the oil can identify the condition of the pump seal, saving money on costly repairs to the motor. Improved new Japanese bearings now fitted as standard.

The SS6-9 is a solid 20kg unit reliable in its performance. Suitable for general pumping of dirty water, as found on building sites, or fixed sump installations, when fitted with an optional automatic float control. With its cast iron construction, the pump is perfectly at home in salt-water environments such as pool repairs.

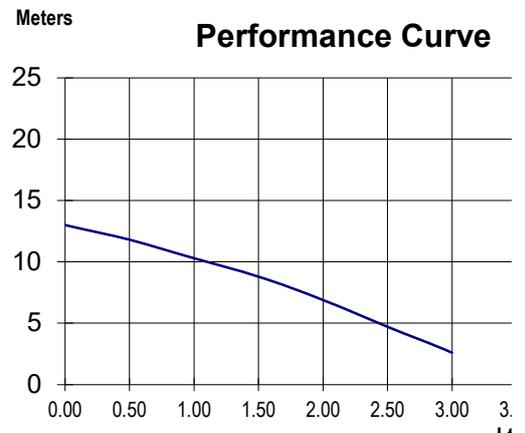

	12.5 m3/hr run out @ zero head
Maximum Head	13m head shut off
Motor Rating	0.5 H.P. (0.4kW)
Voltage	240V
Frequency	50Hz
Amperage	3.9Amps
Speed	2850rpm
Weight	20kg
Discharge Port	2" Camlock (offset)
Power Cable	10 Mts